



FEATURES

- AGM (Absorbed Glass Mat) Technology
- Maintenance Free Design
- Non-Spillable, Leak Proof Construction
- Heavy Duty Pure Lead Grid Design
- Rugged ABS Reinforced Plastic Housing
- Shock and Vibration Resistant Construction
- Very Low Resistance for Ultra Fast Recovery
- M6 Knurled Brass Auto Connectors

APPLICATIONS


- Primary or Secondary Audio Power Source
- Marine/RV Starting or Supplemental Power
- Good for up to 2,400W Audio Power
- High Cranking Performance

PHYSICAL SPECIFICATIONS


Approximate Weight	21.87kg
Approximate Dimensions	
Length	278mm
Width	176mm
Height	190mm
Total Height	190mm
Housing Material	Shock Resistant ABS
Terminal Type	M6 Auto Adaptor

PERFORMANCE SPECIFICATION

Nominal Voltage	12V
Nominal Capacity (20hr)	60Ah to 10.5V
Max Amps @ 77°F (25°C)	3,000A
HCA @ 77°F (25°C)	975A
MCA / CA @ 32°F (0°C)	815A
CCA @ 0°F (-18°C)	685A
Reserve Capacity (25A)	120 minutes to 10.5V

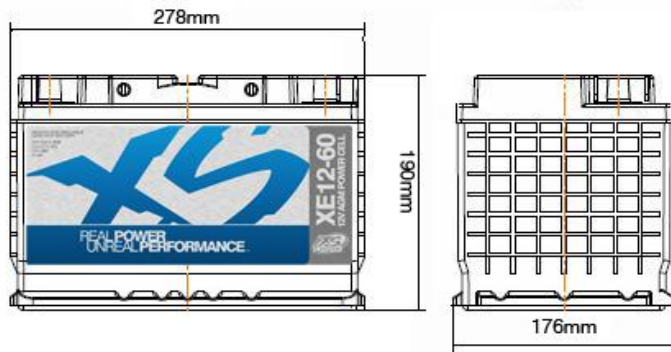

TERMINAL TYPE : M6



TEMPERATURE SPECIFICATIONS

Nominal Operating Temp.	77°F (25°C)
Charge Temp. Range	14°F - 140°F (-10°C - 60°C)
Discharge Temp. Range	-4°F - 140°F (-20°C - 60°C)

Proper Charging is crucial to the life of your XS Power battery. It is very important that the temperature of the battery remains cool with respect to the charge voltage. The chart below will help ensure proper charge voltage with different ranges of ambient temperature.

CHARGE VOLTAGE REFERENCE CHART

Temperature	32°F (0°C)	50°F (10°C)	68°F (20°C)	77°F (25°C)	86°F (30°C)	104°F (40°C)
Charge Voltage	15.20	15.00	14.80	14.70	14.50	14.30
Float Voltage	14.25	14.00	13.75	13.65	13.50	13.25